

Features & Benefits




FOLDING SYSTEM - Improved folding system with heavier hinges on both inside and outside wings.




LOW-PROFILE FLOATING HITCH - New low-profile hitch with heavy duty ball joint at attachment and convenient hose storage area.



SHANK IMPROVEMENT - Improved shank spacing around tires and throughout the machine with no shanks closer than 71 cm on the entire implement.

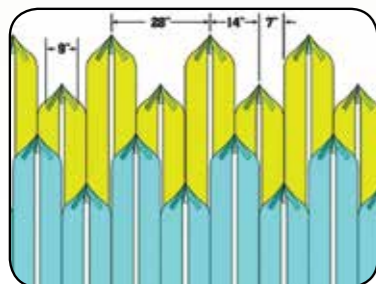

MAX-MIX - The Max-Mix shank pattern increases chemical incorporation, reduces windrowing, and helps eliminate banding.

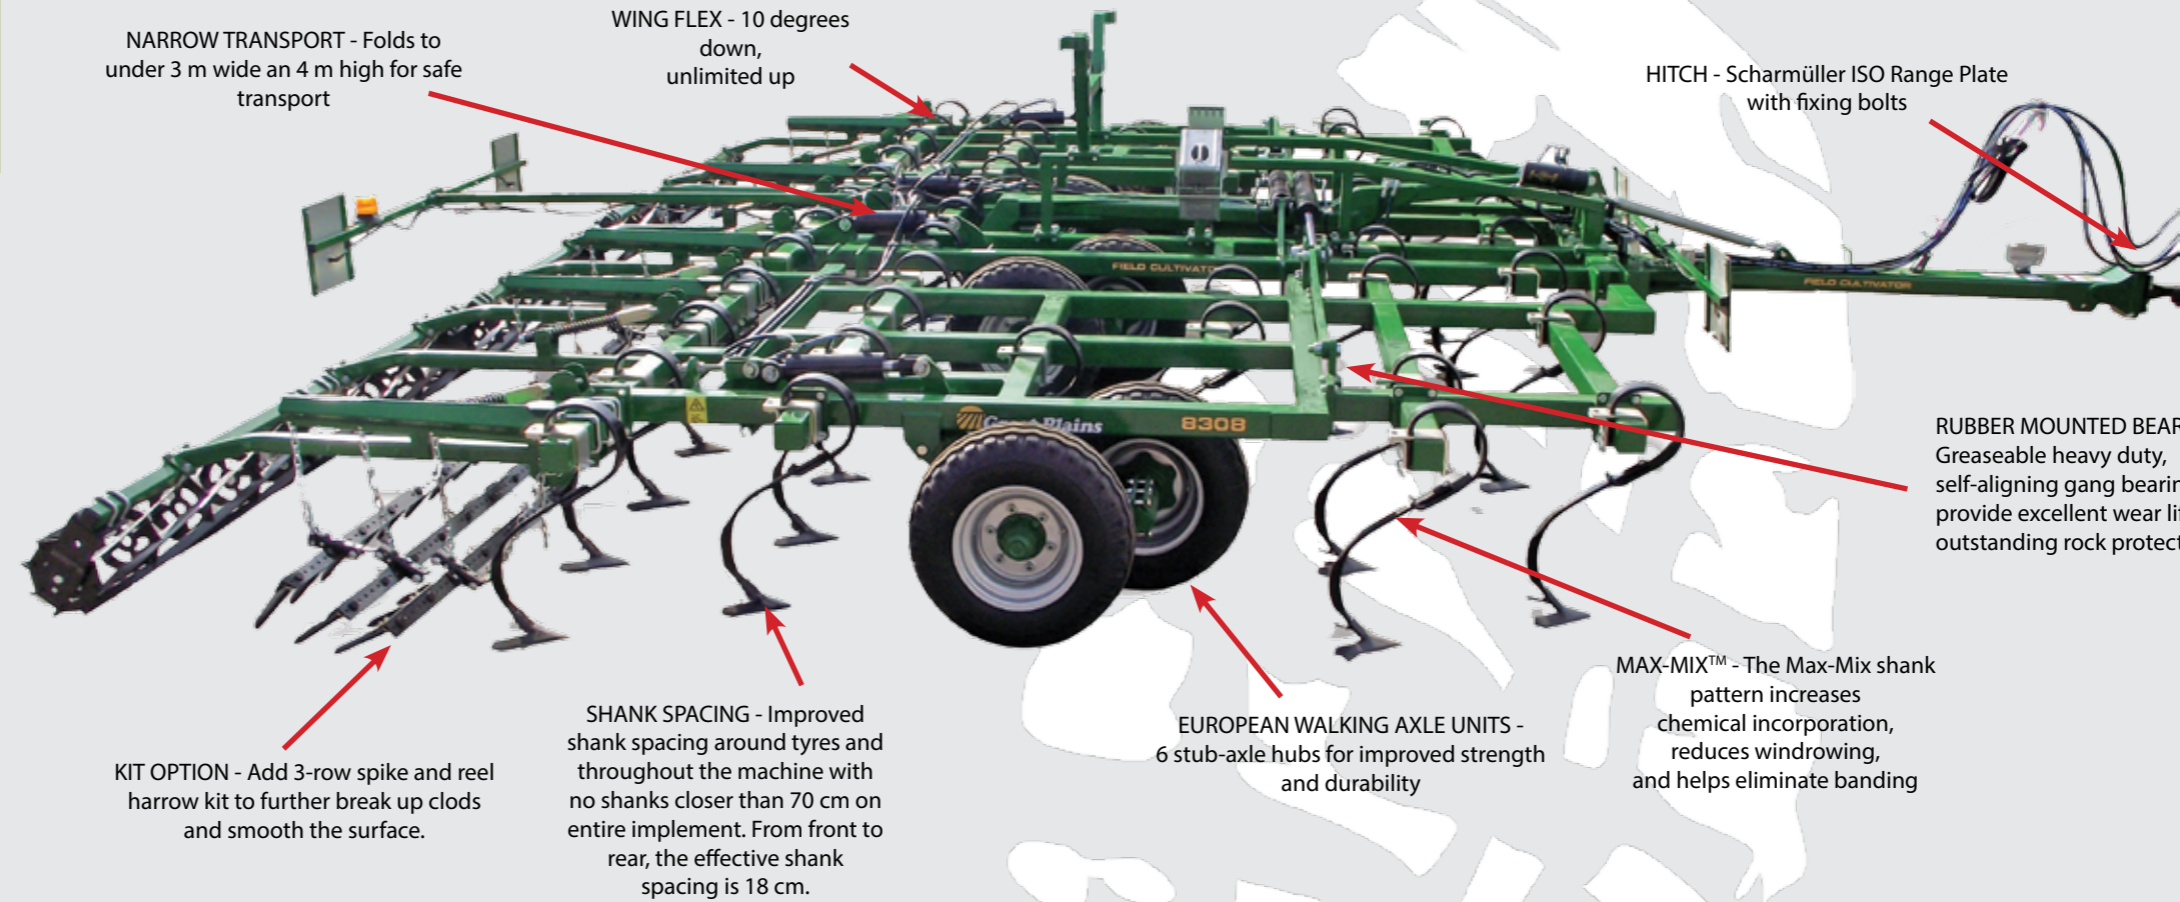

NARROW TRANSPORT - Folds to under 3 m wide and 4 m high for safe transport

WING FLEX - 10 degrees down, unlimited up

HITCH - Scharmüller ISO Range Plate with fixing bolts

RUBBER MOUNTED BEARINGS - Greaseable heavy duty, self-aligning gang bearings provide excellent wear life and outstanding rock protection.

KIT OPTION - Add 3-row spike and reel harrow kit to further break up clods and smooth the surface.

SHANK SPACING - Improved shank spacing around tyres and throughout the machine with no shanks closer than 70 cm on entire implement. From front to rear, the effective shank spacing is 18 cm.

EUROPEAN WALKING AXLE UNITS - 6 stub-axle hubs for improved strength and durability

MAX-MIX™ - The Max-Mix shank pattern increases chemical incorporation, reduces windrowing, and helps eliminate banding



More about the Field Cultivator

The improved 8000 Series Field Cultivator offers the clever way to prepare perfectly firm, uniform, smooth seedbeds.

Shank spacing throughout the machine, especially around tires, has been improved, ensuring no shanks are closer than 71 cm.

The hinges and fold system have also been "beefed up", making folding and unfolding smoother and more reliable.

The floating hitch ensures that the tines work at a constant depth and do not dig in even in uneven terrain.

MODEL INFO

Field Cultivator: Shallow tillage

MODELS	8323FC	8328FC	8332FC	8336FC	8539FC	8544FC	8548FC	8551FC	8556FC	8560FC
Number of sweeps	39	47	55	61	67	75	83	87	95	103
TYRES	9,5Lx15 8-ply (4)		11Lx15 12-ply (4)		11Lx15 f-ply (4)			12,5Lx15 F-ply		
PTO kW required	90 - 131	112 - 149	131 - 164	149 - 187	149 - 205	168 - 224	187 - 243	205 - 261	224 - 280	243 - 299
DIMENSIONS										
TILLAGE WIDTH	7 m	8,5 m	9,9 m	11 m	12 m	13,4 m	14,9 m	15,5 m	17 m	18,4 m
WIDTH (transport)	4,3 m	4,3 m	4,3 m	4,9 m	4,5 m	4,5 m	4,5 m	5,1 m	5,1 m	5,1 m
HEIGHT (transport)	3 m	3,8 m	4,5 m	4,6 m	3,6 m	4,3 m	4,3 m	4,3 m	5 m	5 m
Tillage info										
Centre section	3 m	3 m	3 m	3,65 m	3 m	3 m	3 m	3,65 m	3,65 m	3,65 m
1st wing section	2 m	2,7 m	3,4 m	3,4 m	2,44 m	3,2 m	3,2 m	3,2 m	3,9 m	3,9 m
2nd wing section	N/A	N/A	N/A	N/A	2 m	2 m	2,75 m	2,75 m	2,75 m	3,35 m



Contact us for more information: 086 111 3692

Marius Tolmay ▶ 083-581-5709 ▶ info@agriafrika.co.za
 Mauritz Maree ▶ 071-148-3664 ▶ Delmas
 Johan Roestof ▶ 079-526-1381 ▶ Delmas / Noordwes
 Wessel Pretorius ▶ 072-370-8389 ▶ Bethlehem

Leonard Kennedy ▶ 082-388-1966 ▶ Kaap
 Gerrie Wagenaar ▶ 083-627-7260 ▶ Hoopstad
 Technical ▶ Rudolph Marx ▶ 071-682-8018
 Technical ▶ Louis Smit ▶ 076-851-3360

www.agriafrika.co.za

